

AquaRite® + NG



3 STANDARD **4th** 8000 HOURS



NOT ONLY A SALT CHLORINATOR!! THE BRAIN OF YOUR SWIMMING POOL

NEW

- New design of control box to disinfect, control and regulate all your pool (including variable speed filtration pumps, heat pumps, lighting,...)
- **Clean water at all times:** save on chemicals and offers unrivalled bathing comfort
- **Transparent cell** to enable a visual check of the chlorine production
- New transparent probe holder to facilitate mounting and visual check
- **Control all your pool remotely** with WiFi/Ethernet (optional)
- **Temperature probe included.** Smart filtration mode and heat pump control pre configured



INCLUDED

Cl⁻
Cl Production

Touch Screen
4.3"

Up to 50W

pH
Standard

C°

+4
Control of the 4
auxiliary outputs

Control of
filtration and
VS pumps

Modbus

All your parameters are managed by a dedicated free **Hayward® Poolwatch app** (WiFi connection).



Description	AQR-PL-SV16STNG	AQR-PL-SV22STNG	AQR-PL-SV33STNG	AQR-PL-SV50STNG
Redox kit	E-OPTION-REDOX (plastic probe) / ES (plastic premium probe) / EG (glass probe)			
Free chlorine amperometric probe			H-OPTION-CL	
Free chlorine membrane probe			H-OPTION-CL2	
WiFi module			RS4WI-OPTION-W	
Ethernet module			RS4NET-OPTION-L	
Detachable touch screen			CTS-OPTION-TS	
Detachable TFT screen			AQR-PLUS-PANL	
Acid tank detection			AQR-PLUS-CANNE	
Pool Terre			KV02	

AVAILABLE OPTIONS

NEW

New probe holder PVC transparent included

Flow switch included

pH kit as standard

Redox probe kit as standard

Temperature kit

Free amperometric probe

Free chlorine membrane probe

WiFi module

Ethernet module

Detachable touch screen


Detachable TFT screen

Complete your installation

Supply your filtration pump, salt chlorinator, heat pump, electric cleaner with **HPOWERPRO-P**



AquaRite® + NG



AQUARITE®+ NG


Description	AQR-PL-SV16STNG	AQR-PL-SV22STNG	AQR-PL-SV33STNG	AQR-PL-SV50STNG
Maximum production Cl ₂ /h	16	22	33	50
Salt concentration	From 3g up to 100g of NaCl			
Choice of languages	ES (Spanish) - EN (English) - FR (French) - DE (German) - IT (Italian) - TR (Turkish) - CS (Czech) - PT (Portuguese) - NL (Dutch) - PL (Polish) - HU (Hungarian) - RU (Russian) - HR (Croatian) - HE (Hebrew) - ZH (Chinese)			
Pool volume	75 m ³	100 m ³	150 m ³	200 m ³
Display	4,3" touch screen			
Power supply	230 Vac 50/60 Hz			
Dimensions	270 x 220 x 115 mm			
Electronic box	Black Polycarbonate fireproof plastic			
Protective lid	White ABS fireproof plastic			
Output	8-15 A	10-15 A	10-15 A	35-45A
Consumption	120 W	150 W	150 W	360 W
Main control outputs	Filtration / lighting / heating			
Additional control outputs	4 additional auxiliary relays, configurable by the user			
Self-cleaning	By polarity inversion			
Salinity test	Measures salt concentration (g/L) (precision ±10%)			
Flow detection	Gas sensor + mechanical flow switch			Mechanical flow switch
Alarms	AL3 for pH injection / AL4 for cell configurable			



TRANSPARENT CELL

Description	AQR-PL-SV16STNG	AQR-PL-SV22STNG	AQR-PL-SV33STNG	AQR-PL-SV50STNG
Salt chlorination cell	4 monopolar titanium plates	5 monopolar titanium plates	7 monopolar titanium plates	10 monopolar titanium plates
Minimum flow rate	5 m ³ /h	7 m ³ /h	9 m ³ /h	9 m ³ /h
Plate dimensions	200 x 45 mm	200 x 45 mm	400 x 45 mm	400 x 45 mm
Cell mount material	Transparent PVC plastic			
Cell attachment	Threaded for easy cell mounting			
Flexible piping diameter	63 mm			
Cell dimensions	355 x 305 x 305 mm			
Cell cable	(3 x 4) x 1.5 m (extended cable available see spare part catalogue)			
Maximum pressure	4 kg/cm ²			
Maximum temperature	45 °C			

CONNECTIVITY

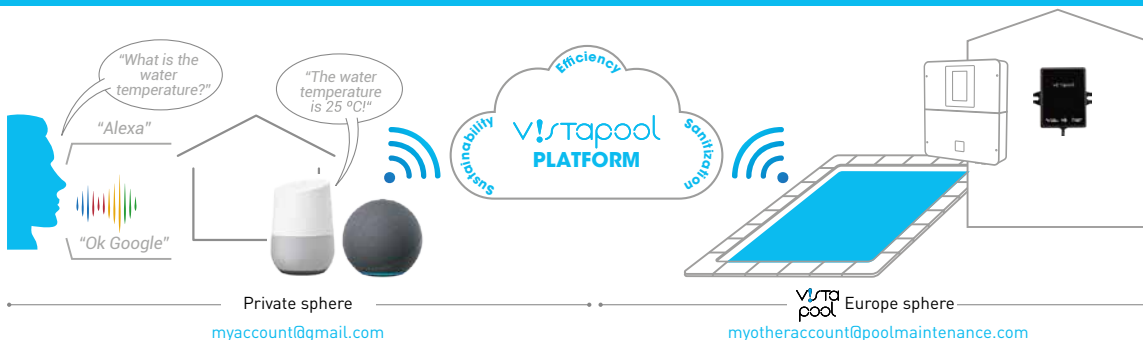

Watch the video

* AquaRite® UV LS / AquaRite® + / AquaRite® Flo Advanced / Control Station

Control all your pool equipment with **Alexa** and **Google Assistant***